## Matte

## The Clear Choice for Paint Protection

- Uniform matte surface appearance
- Best-in-class stain resistance

**PROTEKT** PPF

**BY MADICO** 

- For use on glossy or flat paints
- High-tack adhesive ideal for wrapping edges and curved surfaces
- Superb hydrophobic topcoat
- UV stable, protects against yellowing
- Self-healing topcoat
- Manufacturer's warranty

Protekt Matte PPF by Madico offers a consistent matte appearance with an innovative topcoat that provides best-in-class stain resistance and self-healing properties. Protekt Matte can be trusted to perform in all conditions and is ideal for cars, trucks, motorcycles, ATVs, RVs, utility vehicles, marine vessels, and vehicle fleets. Protekt is designed to protect painted surfaces from common road debris such as stones, gravel, sand, and winter salt.

As an installer, you can be confident the high-tack adhesive will mitigate edge lifting when wrapping and installing on dynamically curved surfaces.

Choose Protekt Matte to provide your customers with a PPF that delivers a superb matte finish, stain resistance and secure edge seal.

Protekt PPF can easily be cut with Madico's MACS plotter system to provide a tailored fit on any vehicle surface.

**MADICO**<sup>®</sup>



Ask us about our total vehicle protection solution - Protekt<sup>®</sup> PPF, ClearPlex windshield protection film, and our wide array of window film product options.

## Protekt Matte PPF Physical Properties

## PROTEKT<sup>®</sup> PPF BY MADICO


Tensile Strength	Elongation at Break	Adhesive Type*	Adhesive Peel Force
<b>25 MPa / 3,564 psi</b>	<b>311%</b>	<mark>Acrylic</mark>	<b>1497 (gm/cm) / 3.3 (lbs/in)</b>
Test Method: ASTM D-882	Test Method: ASTM D-882	High-tack removable	Test Method: FTM 01
Gloss @ 60° 23% GU	Total Film Thickness <b>175 Microns (7 mil)</b> Applied Product	Release Liner <b>75 Microns (3 Mil)</b> Siliconized Polyester	

Specification Use Statement

Reported values are typical properties and should not be used as a specification. Since the user is aware of the specific conditions in which the product is to be used, it is the user's responsibility to determine whether the product is suitable for intended use. If you need verification regarding specific use or additional information, please contact Madico or your local Madico Authorized Dealer.

\* Due to the high-tack nature of Protekt Matte's adhesive, installers should not use isopropyl alcohol solution to help tack the film or seal edges.



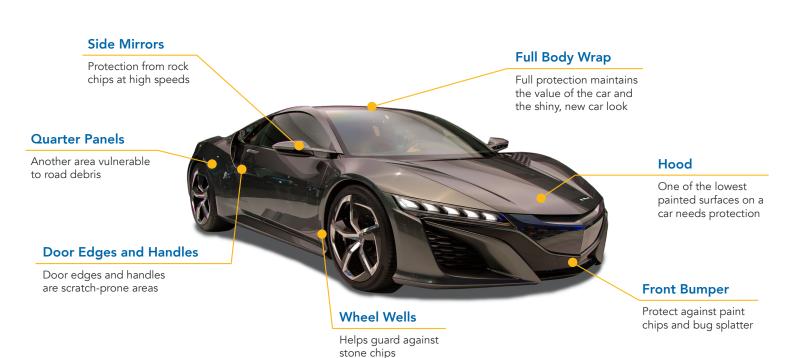

© 2023 Madico, Inc. M956444 10/23